




# PRODUCT CATALOG



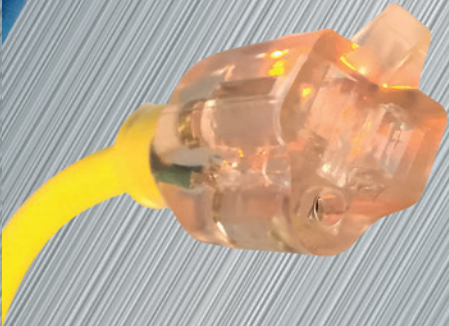


|   |                            |
|---|----------------------------|
| <b>Adapters and Replacement Plugs</b> . . . . .   | 9                          |
| <b>Automotive Booster Cables</b> . . . . .  | 14                         |
| <b>Brooder/Heat Lamps</b> . . . . .   | 14                         |
| <b>Bulk Wire</b><br>All Purpose/ PVC / TPE . . . . .  | 17-19                      |
| <b>Clamp-On Lights - Portable</b> . . . . .   | 14                         |
| <b>Cord Sets - Outdoor Round</b><br>Arctic/Tropic Cords . . . . .<br>Extreme Cords . . . . .<br>Indoor/Outdoor Cords . . . . .<br>Outdoor Landscape Cords - Green . . . . .   | .4<br>.3,4<br>.5,6<br>.6   |
| <b>Cord Sets - Specialty</b><br>"American Pride" Red & Blue Cord . . . . .<br>"Contractors Choice" Red & White Cord . . . . .<br>Outdoor Vinyl Lighted End Cords (Various Colors) . . . . .<br>HI-VIZ Fluorescent Cords . . . . .<br>HI-VIZ Yellow & Black Cord . . . . . | .7<br>.7<br>.7<br>.7<br>.7 |
| <b>GFCI Cords and Accessories</b> . . . . .   | 10                         |
| <b>Replacement Power Cords</b><br>Power Tool Cords . . . . .  | 9                          |
| <b>Specialty Lighting</b><br>Halogen Quartz Portable Lights . . . . .<br>LED Portable Lights . . . . .<br>Light Bulb (Halogen) . . . . .<br>Replacement Cages (String-O-Light) . . . . .<br>String-O-Lights . . . . .   | 12<br>11<br>12<br>11<br>11 |
| <b>Temporary Power Box</b><br>T-Box . . . . .<br>T-Box Cords . . . . .  | .15,16<br>.15,16           |
| <b>Triple Outlet Cord Sets</b><br>Arctic/Tropic . . . . .<br>Indoor/Outdoor . . . . .<br>HI-VIZ Yellow & Black . . . . .  | 4<br>5,6<br>7              |
| <b>Trouble Lights</b> . . . . .   | 13                         |
| <b>Twist-To-Lock Cord Sets &amp; Adapters</b><br>Twist-To-Lock Adapters . . . . .<br>Twist-To-Lock Cord Sets . . . . .  | 8<br>8                     |
| <b>Glossary</b> . . . . .   | 20                         |
| <b>Numerical Index</b> . . . . .  | 23                         |
| <b>Industrial Garden Hoses</b> . . . . .  | 21,22                      |



Manufactured by Flexon Industries, an affiliate of U.S. Wire Corporation.  
Customers may combine both wire and hose products to meet minimum  
or prepaid order requirements.

U.S. Wire & Cable reserves the right to modify, change or discontinue any  
and all products or specifications contained in this catalog at any time  
without prior notice.

Outdoor Round Cord Sets / Triple Outlet Cords

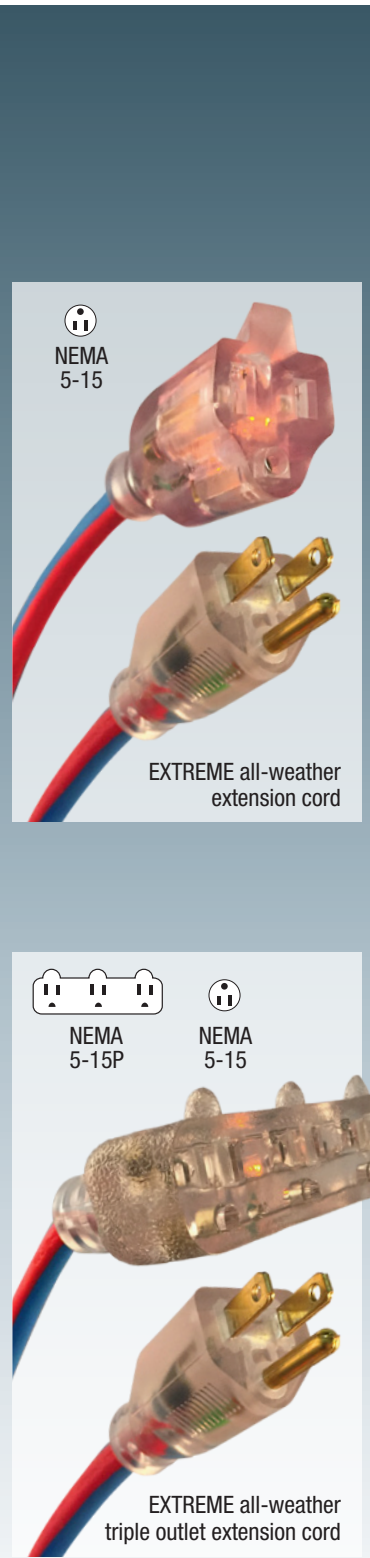

All U.S. Wire cord sets and Triple Outlet cords are double insulated - individually insulated conductors surrounded by and outside jacket - with solid molded plugs. Outer jacket will not mar floors or walls and is resistant to abrasion and deterioration from moisture and sunlight.

# EXTREME

## All-Weather TPE Extension Cords




Indoor/ outdoor use  
Ultra flexible  
Lighted end

## STAYS FLEXIBLE IN EXTREME TEMPERATURES!

The EXTREME All-Weather Extension Cord is constructed of 100% TPE (thermo-plastic elastometer) compound which allows the cord to stay flexible in the most extreme climates without effecting the cord's performance.

Furthermore, the TPE compound provides a lightweight, tangle-free construction to the EXTREME cord, not commonly found on most standard PVC cords. Tested in some of the harshest weather conditions in Alaska, the EXTREME All-Weather Extension Cord is designed for durability to last a lifetime!

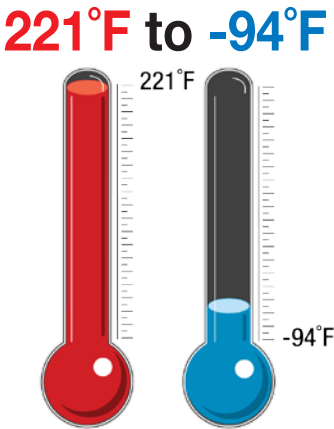

### Three Conductor Grounded EXTREME All-Weather Cord - 300V

TPE-Rubber (SJEOW) which provides maximum flexibility year-round. Includes power indicator light to show when power is on.

| ITEM #   | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|----------|-----------|--------------|-------------|------|--------------|---------------|
| 97025    | 16/3      | 25           | 13A         | 16   | 20           | 71030-5       |
| 97050    | 16/3      | 50           | 13A         | 12   | 36           | 71031-2       |
| 97100    | 16/3      | 100          | 10A         | 6    | 36           | 71032-9       |
| 98025    | 14/3      | 25           | 15A         | 16   | 14           | 70012-2       |
| 98050    | 14/3      | 50           | 15A         | 6    | 18           | 70013-9       |
| 98100    | 14/3      | 100          | 13A         | 3    | 18           | 70014-6       |
| 99025    | 12/3      | 25           | 15A         | 12   | 39           | 70017-7       |
| 99050    | 12/3      | 50           | 15A         | 4    | 26           | 70015-3       |
| 99100    | 12/3      | 100          | 15A         | 2    | 26           | 70016-0       |
| 90050EXT | 10/3      | 50           | 15A*        | 2    | 22           | 71032-9       |
| 90100EXT | 10/3      | 100          | 15A*        | 1    | 22           | 70051-1       |

### Three Conductor Grounded EXTREME Triple Outlet - 300V

Heavy duty female plug allows for connection of three separate cords.

| ITEM #  | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|---------|-----------|--------------|-------------|------|--------------|---------------|
| 98025PB | 14/3      | 25           | 15A         | 6    | 14           | 70023-8       |
| 98050PB | 14/3      | 50           | 15A         | 4    | 18           | 70024-5       |
| 98100PB | 14/3      | 100          | 13A         | 2    | 18           | 70025-2       |
| 99002PB | 12/3      | 2            | 15A         | 12   | 12           | 70018-4       |
| 99025PB | 12/3      | 25           | 15A         | 12   | 39           | 70019-1       |
| 99050PB | 12/3      | 50           | 15A         | 4    | 26           | 70020-7       |
| 99100PB | 12/3      | 100          | 15A         | 2    | 26           | 70021-4       |

\*Plugs rated 15A

### Arctic/Tropic™ Oil Resistant TPE-Extension Cord Sets

Arctic/Tropic cords are made of oil resistant TPE-Rubber (SJEOW) which provides maximum flexibility year-round. Cords retain strength in temperatures as high as 212°F and flexibility in temperatures as low as -58°F. Superior resistance to sunlight, ozone, cracking, and chemicals, makes it great for use in garages and industrial applications where extra protection is needed. Yellow jacket color is a highly visible safety color for work sites.

### Three Conductor Grounded Arctic/Tropic Yellow Cord - 300V

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 88025  | 12/3      | 25           | 15A         | 12   | 43           | 10014-4       |
| 88050  | 12/3      | 50           | 15A         | 4    | 29           | 10016-8       |
| 88100  | 12/3      | 100          | 15A         | 2    | 29           | 10018-2       |


### Three Conductor Grounded Arctic/Tropic Yellow Triple Outlet - 300V

Heavy duty female plug allows for connection of three separate cords.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 89002  | 12/3      | 2            | 15A*        | 12   | 12           | 10020-5       |
| 89025  | 12/3      | 25           | 15A*        | 12   | 43           | 10022-9       |
| 89050  | 12/3      | 50           | 15A*        | 4    | 29           | 10024-3       |
| 89100  | 12/3      | 100          | 15A*        | 2    | 29           | 10025-0       |



Outdoor Round Cord Sets / Triple Outlet Cords

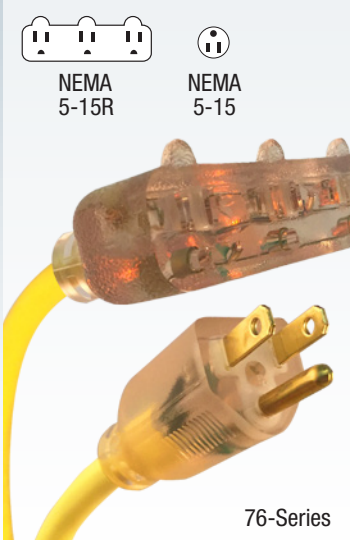

Vinyl Cord Sets

These cords were developed to meet the demands of contractors for a super flexible vinyl cord set. Specially formulated SJTW vinyl outer jacket won't crack or break, even at temperatures as low as -35° F. Highly visible yellow color for safety

Three Conductor Grounded Yellow Cord - 300V

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 59025  | 12/3      | 25           | 15A         | 12   | 46           | 41006-9       |
| 59050  | 12/3      | 50           | 15A         | 4    | 31           | 41008-3       |
| 59100  | 12/3      | 100          | 15A         | 2    | 31           | 41010-6       |

Lighted Vinyl Cord Sets

Same construction as the vinyl cord set with the addition of power indicator light to show when power is on. Designed with convenience in mind, easily seen in day or night.

Three Conductor Grounded Yellow Cord with Illuminated Plug - 300V

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 72025  | 16/3      | 25           | 13A         | 12   | 24           | 40000-8       |
| 72050  | 16/3      | 50           | 13A         | 12   | 43           | 40001-5       |
| 72100  | 16/3      | 100          | 10A         | 6    | 43           | 40002-2       |
| 73025  | 14/3      | 25           | 15A         | 6    | 17           | 40003-9       |
| 73050  | 14/3      | 50           | 15A         | 4    | 22           | 40004-6       |
| 73100  | 14/3      | 100          | 13A         | 2    | 20           | 40005-3       |
| 74025  | 12/3      | 25           | 15A         | 12   | 46           | 40006-0       |
| 74050  | 12/3      | 50           | 15A         | 4    | 31           | 40007-7       |
| 74100  | 12/3      | 100          | 15A         | 2    | 31           | 40008-4       |
| 68050  | 10/3      | 50           | 15A*        | 2    | 26           | 42592-6       |
| 68100  | 10/3      | 100          | 15A*        | 2    | 48           | 42594-0       |

Three Conductor Grounded Yellow Triple Outlet with Illuminated Plug - 300V

Heavy duty female plug allows for connection of three separate cords.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 76002  | 12/3      | 2            | 15A         | 12   | 46           | 40015-2       |
| 76025  | 12/3      | 25           | 15A         | 12   | 46           | 40013-8       |
| 76050  | 12/3      | 50           | 15A         | 4    | 31           | 40011-4       |
| 76100  | 12/3      | 100          | 15A         | 2    | 31           | 40012-1       |

Standard Hard Service Vinyl Cord Sets

Indoor/Outdoor SJTW vinyl cord sets constructed with double insulation and molded-on plugs. Orange, non-marring outer jacket. Packaging includes consumer information for easy selection of desired cord type.

Two Conductor Polarized Orange Cord - 300V

Polarized plug provides correct insertion into grounded receptacle.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 53010  | 16/2      | 10           | 13A         | 24   | 17           | 42515-5       |
| 53025  | 16/2      | 25           | 13A         | 12   | 19           | 42520-9       |
| 53050  | 16/2      | 50           | 13A         | 12   | 36           | 42525-4       |
| 53100  | 16/2      | 100          | 10A         | 6    | 36           | 43530-8       |

Three Conductor Grounded Orange Cord - 300V

SJTW, medium flexibility vinyl cord set.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 60010  | 16/3      | 10           | 13A         | 24   | 20           | 42535-3       |
| 60025  | 16/3      | 25           | 13A         | 12   | 25           | 42540-7       |
| 60050  | 16/3      | 50           | 13A         | 12   | 49           | 42545-2       |
| 60100  | 16/3      | 100          | 10A         | 6    | 49           | 42550-6       |
| 63025  | 14/3      | 25           | 15A         | 6    | 16           | 42555-1       |
| 63050  | 14/3      | 50           | 15A         | 4    | 21           | 42560-5       |
| 63100  | 14/3      | 100          | 13A         | 2    | 21           | 42565-0       |

Three Conductor Grounded Orange Triple Outlet - 300V

SJTW, Heavy-duty female plug allows for connection of three separate cords.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 62010  | 14/3      | 10           | 15A         | 12   | 13           | 43000-5       |
| 62025  | 14/3      | 25           | 15A         | 6    | 16           | 43002-9       |
| 62050  | 14/3      | 50           | 15A         | 4    | 21           | 43004-3       |
| 62100  | 14/3      | 100          | 13A         | 2    | 21           | 43006-7       |

Three Conductor Grounded Yellow Triple Outlet - 600V



Extra heavy-duty hard service cord, female plug allows for connection of three separate cords.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 66050  | 12/3      | 50           | 15A         | 4    | 31           | 66050-1       |
| 66100  | 12/3      | 100          | 15A         | 2    | 31           | 66052-5       |

Three Conductor Grounded Green Cord - 300V





Designed to blend easily with outdoor surroundings.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 50040  | 16/3      | 40           | 13A         | 12   | 49           | 68050-9       |
| 50080  | 16/3      | 80           | 10A         | 6    | 49           | 68055-4       |

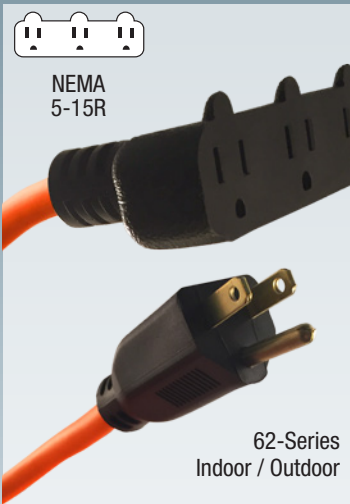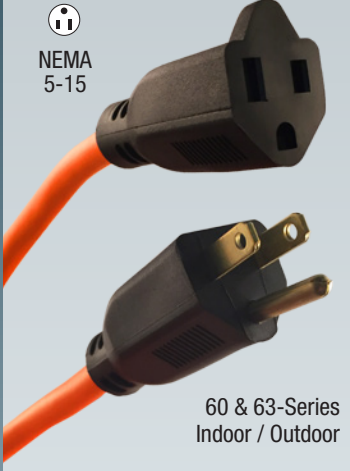



Outdoor Round Cord Sets / Triple Outlet Cords

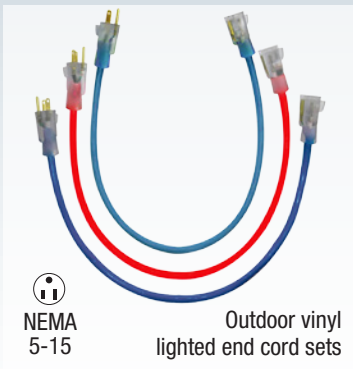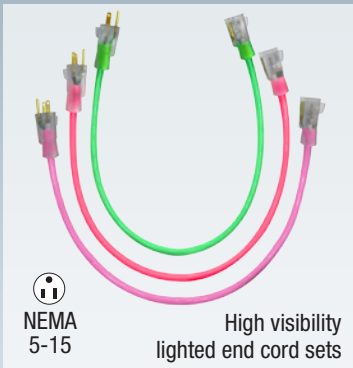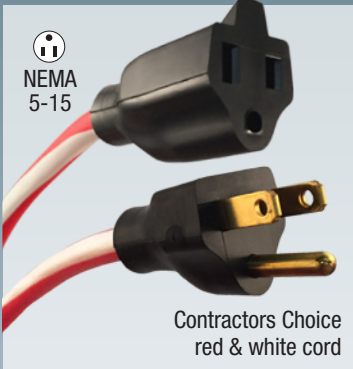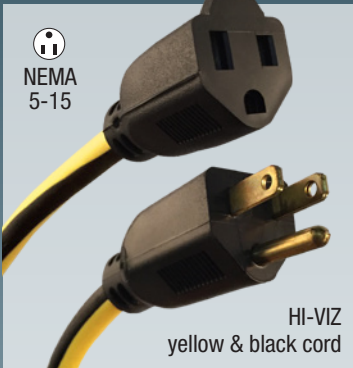

Specialty Hard Service Vinyl Cord Sets

Outdoor or indoor SJTW vinyl cord sets constructed with double insulation and molded-on plugs. These cords were designed for promotional themes or for specific uses.

Three Conductor Grounded HI-VIZ Yellow & Black Cord -300V

Cord color designed for greater visibility and added safety, constructed with low-temperature extra flexible Temp-Flex cord material.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 54075  | 14/3      | 75           | 15A         | 4    | 31           | 42710-4       |
| 54100  | 14/3      | 100          | 13A         | 2    | 21           | 42712-8       |
| 55050  | 12/3      | 50           | 15A         | 4    | 31           | 42532-2       |
| 55100  | 12/3      | 100          | 15A         | 2    | 31           | 42533-9       |

Three Conductor Grounded HI-VIZ Yellow & Black Triple Outlet - 300V

SJTW, Heavy-duty female plug allows for connection of three separate cords.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 42050  | 14/3      | 50           | 15A         | 4    | 21           | 42689-3       |

"American Pride" Three Conductor Grounded Red & Blue Cord - 300V

Promotional patriotic theme, easily visible cord color for safety.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 58050  | 12/3      | 50           | 15A*        | 4    | 31           | 42532-2       |

"Contractors Choice" Three Conductor Grounded Red & White Cord - 300V

Red & White striped outer jacket for visibility and added safety.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 58100  | 14/3      | 100          | 13A         | 2    | 21           | 42712-8       |

High Visibility Lighted-End Cords - 300V

High visibility lighted-end cords combine all the features of our standard vinyl outdoor extension cords with ultra-high-visibility fluorescent colors plus a lighted receptacle. When the cord is plugged in, the lamp in the female connector lights up to tell you the power is on. FLUORESCENT: Green (GR), Pink (PK), or Purple (PP)

| ITEM #   | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|----------|-----------|--------------|-------------|------|--------------|---------------|
| 96050GRL | 12/3      | 50           | 15A         | 4    | 31           | 70000-9       |
| 96100GRL | 12/3      | 100          | 15A         | 2    | 31           | 70001-6       |
| 96050PKL | 12/3      | 50           | 15A         | 4    | 31           | 70002-3       |
| 96100PKL | 12/3      | 100          | 15A         | 2    | 31           | 70003-0       |
| 96050PPL | 12/3      | 50           | 15A         | 4    | 31           | 70004-7       |
| 96100PPL | 12/3      | 100          | 15A         | 2    | 31           | 70005-4       |

Outdoor Vinyl Lighted-End Cord Sets in Various Colors - 300V

VARIOUS COLORS: Medium Blue (MB), Red (RD) and Dark Blue (DB)

| ITEM #   | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|----------|-----------|--------------|-------------|------|--------------|---------------|
| 96050MBL | 12/3      | 50           | 15A         | 4    | 31           | 70008-5       |
| 96100MBL | 12/3      | 100          | 15A         | 2    | 31           | 70009-2       |
| 96050RDL | 12/3      | 50           | 15A         | 4    | 31           | 70006-1       |
| 96100RDL | 12/3      | 100          | 15A         | 2    | 31           | 70007-8       |
| 96050DBL | 12/3      | 50           | 15A         | 4    | 31           | 70010-8       |
| 96100DBL | 12/3      | 100          | 15A         | 2    | 31           | 70011-5       |

Twist-To-Lock Cord Sets & Adapters

Designed for the professional contractor for on-the-job safety, Twist-To-Lock plugs will not disconnect causing interrupted circuits. Both male and female three conductor plugs are permanently molded-on. Available in 50 and 100 ft. cord sets or short length adapters.

Twist-To-Lock Yellow Cord Set - SJTW 300V

Heavy-duty round 300V cord set with male and female twist-to-lock connections.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 33050  | 12/3      | 50           | 20A         | 4    | 31           | 66044-0       |
| 33100  | 12/3      | 100          | 20A         | 2    | 31           | 66045-7       |

Twist-To-Lock Yellow Cord Set - STW 600V

Extra heavy-duty, 600V round cord set with male and female twist-to-lock connections.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 32050  | 12/3      | 50           | 20A         | 2    | 22           | 66041-9       |
| 32100  | 12/3      | 100          | 20A         | 2    | 42           | 66042-6       |

Twist-To-Lock Multiple Outlet Adapter - STW 600V

Converts any Twist-to-Lock extension cord set to double or triple outlet cord. Heavy-duty round yellow 600V cord.

| ITEM # | GA / COND | # OF OUTLETS | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 35002  | 12/3      | 2 "Y"        | 20A         | 12   | 40           | 66046-4       |
| 35003  | 12/3      | 3 "W"        | 20A         | 12   | 27           | 66047-1       |

Twist-To-Lock Converter Adapter - STW 600V

Converts any 20A Twist-to-Lock extension cord to 15A standard cord. Heavy-duty round yellow 600V cord. 20A male to 15A female or 20A female to 15A male.

| ITEM # | GA / COND | LENGTH (IN.) | CONVERTS M TO F | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-----------------|------|--------------|---------------|
| 35010  | 12/3      | 12           | 20A to 15A      | 12   | 40           | 66048-8       |
| 35015  | 12/3      | 12           | 15A to 20A      | 12   | 27           | 66049-5       |



NEMA L5-20 Twist-to-lock cord set




NEMA L5-20 Twist-to-lock multiple outlet adapters




NEMA L5-20 Twist-to-lock converter adapters


Replacement Power Cords / Adapters / Replacement Plugs




NEMA 5-15P




Three conductor replacement power tool cord




NEMA 5-15R




Triple outlet adapter




NEMA 5-15P




NEMA 5-15R




Replacement plugs (Yellow)




NEMA 5-15P




NEMA 5-15R



Industrial replacement plugs (Black)



NEMA 5-15



U-Ground multiple outlet adapter

Replacement cords are designed to replace worn or damaged cords for major appliances and power tools. Air conditioner/major appliance cord sets are manufactured with right angle plugs to guard against accidental pull-out. Dryer and range cords are SRDT wire with molded-on right angle plugs, power tool cords have two or three conductor molded-on plugs.

Replacement Power Tool Cord

Three conductor SJTW round black cord with grounded plug.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 54183  | 18/3      | 8            | 10A         | 24   | 12           | 68084-4       |
| 54163  | 16/3      | 8            | 13A         | 24   | 16           | 68085-1       |
| 54265  | 16/3      | 10           | 13A         | 24   | 15           | 68090-5       |
| 54266  | 14/3      | 10           | 15A         | 24   | 20           | 68091-2       |

Replacement Power Tool Cord

Two conductor SJTW round black cord with polarized plug.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 54182  | 18/2      | 8            | 10A         | 24   | 6            | 68080-6       |
| 54162  | 16/2      | 8            | 13A         | 24   | 13           | 68082-0       |

Same as above with SJEW round black cord.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 54165  | 16/2      | 10           | 13A         | 24   | 11           | 68088-2       |

A variety of UL and non-UL listed adapters and replacement plugs, both male and female, are available from U.S. Wire. All these items are bulk packed.

Triple Outlet Adapter

Three conductor adapter, yellow color.

| ITEM # | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-------------|------|--------------|---------------|
| 70000  | 15A         | 20   | 9            | 45032-4       |

Replacement Plug - Yellow

Male and female replacement plugs, molded vinyl thermoplastic for three conductor wire.

| ITEM # | 125V RATING  | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|--------------|------|--------------|---------------|
| 70002  | 15A (MALE)   | 10   | 3            | 45033-1       |
| 70004  | 15A (FEMALE) | 10   | 3            | 45034-8       |

Industrial Replacement Plug - Black

Heavy-duty male and female replacement plugs, molded thermoplastic for three conductor wire.

| ITEM # | 125V RATING  | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|--------------|------|--------------|---------------|
| 70102  | 15A (MALE)   | 10   | 3            | 45036-2       |
| 70104  | 15A (FEMALE) | 10   | 3            | 45035-5       |

U-Ground Multiple Outlet Adapter - STW 600V

Converts any extension cord set to double or triple outlet cord. Heavy-duty round yellow 600V cord.

| ITEM # | GA / COND | # OF OUTLETS | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 35002U | 12/3      | 2 "Y"        | 20A         | 12   | 40           | 66053-2       |
| 35003U | 12/3      | 3 "W"        | 20A         | 12   | 27           | 66054-9       |

Portable Ground Fault Circuit Interrupters

Portable GFCI units provide the user personal protection from ground faults anywhere electrical equipment is used. Units shut off the flow of current immediately when dangers such as frayed or worn insulation or faulty connections occur.

Quad Box with In-Line GFCI

Handy, compact unit with double outlets for indoor/outdoor use. Hi-impact plastic case, SJTW wire type. Unit has both reset and manual test buttons.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 50017  | 12/3      | 6            | 15A         | 4    | 16           | 42697-8       |

In-Line GFCI to Triple Outlet

Permanently molded triple outlet with in-line GFCI unit. Unit has both reset and manual test buttons. For indoor or outdoor use, SJTW wire type.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 50020  | 12/3      | 2            | 15A         | 6    | 6            | 42698-5       |

Attachable D.I.Y. GFCI Rainproof Plug


Do-it-yourself GFCI plug can be attached to any power tool or cord set, up to 12/3 wire, to make it meet OSHA specs for GFCI protection. Special sealant included to create rainproof connection

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 50022  | —         | —            | 15A         | 10   | 7            | 42720-3       |


Triple Outlet with GFCI Plug

Low temperature SJTW, yellow cord with a permanently molded triple outlet at one end and a GFCI plug at the other. Plug has both reset and manual test buttons and is rainproof.


| ITEM # | GA / COND | LENGTH (FT.) | 250V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 50024  | 12/3      | 2            | 15A         | 12   | 12           | 42724-1       |
| 50025  | 12/3      | 25           | 15A         | 2    | 8            | 42725-8       |
| 50026  | 12/3      | 50           | 15A         | 2    | 16           | 42726-5       |
| 50028  | 12/3      | 100          | 15A         | 2    | 30           | 42728-9       |




NEMA 5-15P

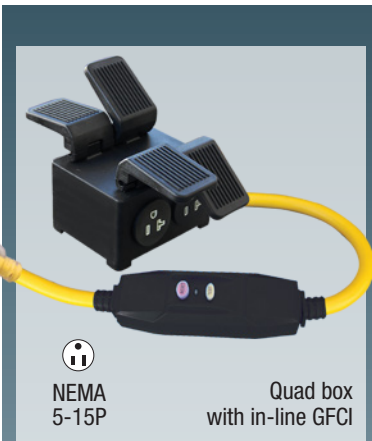

Quad box with in-line GFCI



NEMA 5-15P

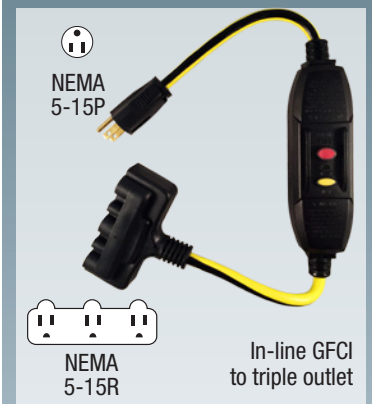


In-line GFCI to triple outlet




NEMA 5-15P




Attachable D.I.Y. GFCI rainproof plug




NEMA 5-15P




NEMA 5-15R

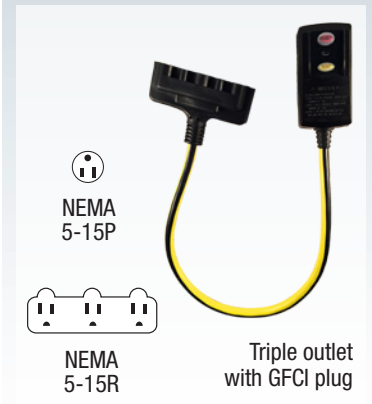

Triple outlet with GFCI plug

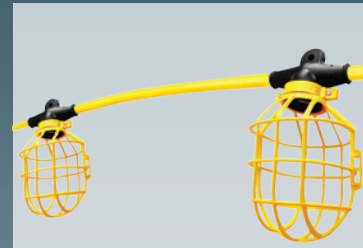



NEMA 5-15

String-O-Lights





NEMA 5-15

Portable LED light (46305N)





NEMA 5-15P

Housing detaches easily from tripod

Portable LED light with tripod (46403N)

String-O-Lights

String-O-Lights is a flexible temporary lighting system available in five or ten socket configurations. Each bulb cage is plastic coated, non-metallic construction with a specially molded eyelet for easy hanging. STW wire, yellow cord color.

Heavy Duty String-O-Lights - 300V

| ITEM #   | GA / COND | LENGTH (FT.)    | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|----------|-----------|-----------------|-------------|------|--------------|---------------|
| 45005J   | 12/3      | 50 (5 socket)   | 15A         | 1    | 15           | 42821-7       |
| 45010J   | 12/3      | 100 (10 socket) | 15A         | 1    | 29           | 42818-7       |
| 45005MCJ | 12/3      | 50 (5 socket)   | 15A         | 1    | 15           | 42836-1       |
| 45010MCJ | 12/3      | 100 (10 socket) | 15A         | 1    | 29           | 42837-8       |

Heavy Duty String-O-Lights - 600V

| ITEM #  | GA / COND | LENGTH (FT.)    | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|---------|-----------|-----------------|-------------|------|--------------|---------------|
| 45005   | 12/3      | 50 (5 socket)   | 15A         | 1    | 15           | 42820-0       |
| 45010   | 12/3      | 100 (10 socket) | 15A         | 1    | 29           | 42822-4       |
| 45005MC | 12/3      | 50 (5 socket)   | 15A         | 1    | 15           | 42827-9       |
| 45010MC | 12/3      | 100 (10 socket) | 15A         | 1    | 29           | 42828-6       |

String-O-Light Replacement Cages

Available in plastic and metal.


| ITEM #   | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|----------|-----------|--------------|-------------|------|--------------|---------------|
| 45005RCP | -         | -            | -           | 20   | 5            | 42825-5       |
| 45005RCM | -         | -            | -           | 20   | 7            | 42826-2       |

Contractor Lighting Products


LED PORTABLE LIGHTS

U.S. Wire's LED Worklights feature a die-cast aluminum frame and include COB (Chip on board) Technology. COB chips contain multiple diodes which work to save energy and provide a longer lifespan to the worklight. COB also leads to improved lumen-per-watt ratios in comparison to other LED technologies. Each worklight offers an 18/3 SJTW Cord (except on cordless models) and provides a much lower heat output compared to halogen lights.


LOW HEAT OUTPUT



COB TECHNOLOGY



GREEN ENERGY SAVER



| ITEM # | LUMENS* | GA / COND | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|---------|-----------|-------------|------|--------------|---------------|
| 46302N | 880     | 18/3      | 10A         | 4    | 9            | 42990-0       |
| 46305N | 1500    | 18/3      | 13A         | 2    | 12           | 42991-7       |
| 46405N | 3500    | 18/3      | 13A         | 2    | 12           | 42992-4       |
| 46306N | 880     | CORDLESS  |             | 2    | 13           | 42989-4       |
| 46303N | 3000    | 18/3      | 15A         | 2    | 36           | 42993-1       |
| 46403N | 8400    | 18/3      | 15A         | 2    | 45           | 42994-8       |

\*Lumen output may increase on items listed above due to continuing advances in LED technology.

Halogen Quartz Portable Light - Yellow

Quartz light with 500 watt bulb. 3 ft. grounded cord and plug.

| ITEM # | # OF BULBS | TOTAL WATTAGE | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|------------|---------------|------|--------------|---------------|
| 46005N | 1          | 500           | 6    | 6            | 42834-7       |

Halogen Quartz Portable Light with Tripod - Yellow

The 500 watt bulbs in these quartz lights are 33% brighter than incandescent bulbs. Each bulb cage has an instant On/Off switch, directional pivot base and 8 ft. grounded cord and plug. Telescoping tripod will extend up to 7 ft. Collapsible for easy storage.

| ITEM # | # OF BULBS | TOTAL WATTAGE | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|------------|---------------|------|--------------|---------------|
| 46001N | 1          | 500           | 2    | 16           | 42830-9       |
| 46003N | 2          | 1000          | 2    | 19           | 42832-3       |

Heavy Duty Halogen Quartz Portable Light - Green

Quartz light with 500 watt bulb. 3 ft. grounded cord and plug with ON / OFF switch.

| ITEM # | WATTAGE | VOLT RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|---------|-------------|------|--------------|---------------|
| 46105N | 1       | 500         | 6    | 24           | 42835-4       |

Heavy Duty Halogen Quartz Portable Light with Tripod - Green

Telescoping tripod will extend up to 6 ft. Collapsible for easy storage. Detachable base. ON / OFF switch.

| ITEM # | # OF BULBS | TOTAL WATTAGE | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|------------|---------------|------|--------------|---------------|
| 46103N | 2          | 1000          | 2    | 19           | 42833-0       |

Halogen Light Bulbs

500 watt bulb for use with Halogen Portable Lights.

| ITEM #   | WATTAGE | BULBS / PACK | PACKS / CASE | BULBS / CASE | WEIGHT (LBS) | UPC: 0-44882- |
|----------|---------|--------------|--------------|--------------|--------------|---------------|
| 46020B   | 500     | 1            | 20           | 20           | 2            | 42839-2       |
| 46020BB3 | 500     | 3            | 24           | 72           | 5            | 42836-1       |
| 46020BB6 | 500     | 6            | 12           | 72           | 5            | 42835-4       |





NEMA 5-15

Portable Halogen Light (46005N)





NEMA 5-15P

Portable halogen light with tripod (46003N)





NEMA 5-15

Portable Halogen Light (46105N)





NEMA 5-15P

Housing detaches easily from tripod

Portable halogen light with tripod (46103N)

11

12



Trouble Lights



Portable Trouble Lights with Plastic Cage

U.S. Wire manufacturers a complete line of Trouble Lights to meet the varying quality and price requirements of our customers. All are UL listed and meet OSHA specifications. Plugs are molded on for permanent use.

Two Conductor Trouble Light

Polarized, two conductor trouble light, SJT wire type with orange cord. Bulb cage is white colored plastic with swivel hook. For bulbs up to 75 watts.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| TL215  | 18/2      | 15           | —           | 6    | 8            | 66024-2       |
| TL225  | 18/2      | 25           | —           | 6    | 12           | 66028-0       |

Three Conductor Trouble Light with Outlet

Deluxe trouble light with grounded outlet on handle. SJT wire type with orange cord. Bulb cage is white colored plastic with swivel hook. For bulbs up to 75 watts.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| TL325  | 16/3      | 25           | 13A         | 8    | 19           | 42020-4       |
| TL350  | 16/3      | 50           | 13A         | 6    | 26           | 42022-8       |

Portable Trouble Lights with Grounded Metal Cage

Three Conductor Trouble Light with Outlet

Same as above with grounded metal bulb cage and hook. Grounded outlet on handle, SJT wire type with orange cord. 75 watts.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| TL525  | 16/3      | 25           | 13A         | 8    | 22           | 42028-0       |
| TL550  | 16/3      | 50           | 13A         | 6    | 26           | 42030-3       |

Heavy Duty Trouble Light

Includes a grounded outlet on handle, grounded metal bulb cage and hook. Uses our low temperature weather resistant yellow cord. SJT wire. 75 watts.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| TL625  | 14/3      | 25           | 15A         | 8    | 22           | 42050-1       |
| TL650  | 14/3      | 50           | 15A         | 6    | 36           | 42055-6       |

Frigid-Flex™ Trouble Light

Heavy-duty trouble light with grounded outlet on handle and grounded metal bulb cage and hook. Uses our low temperature Frigid-Flex all weather blue cord. SJEW wire. 75 watts.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| TL825  | 16/3      | 25           | 13A         | 8    | 21           | 42646-6       |
| TL850  | 16/3      | 50           | 13A         | 6    | 26           | 42648-0       |

Circuit Breaker Protected Trouble Light

Circuit breaker prevents overloading to light cord and household circuits. Trouble light with grounded outlet on handle and grounded metal bulb cage and hook. SJT wire type with yellow cord. 100 watts.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| TL925  | 14/3      | 25           | 15A         | 6    | 23           | 42060-0       |

Portable Clamp-On Lights / Brooder/Heat Lamps / Booster Cables

U.S. Wire clamp-on lights are great for use around the home, shop and office. These versatile utility lamps have polished aluminum reflectors, on/off push through switches and polarized molded-on plugs. Brooder/Heat lamps are ideal temporary heat sources for chicken and pig brooders. Socket is insulated porcelain, flexible heavy gauge cord with molded-on plug.

Portable Clamp-On Light

Lamp with threaded neck for easy attachment of reflector. 18 gauge, 2 conductor SPT-2 wire.

| ITEM # | REFLECTOR DIAMETER | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|--------------------|--------------|-------------|------|--------------|---------------|
| 30005  | 5-1/2"             | 6            | 60W         | 6    | 6            | 42674-9       |
| 30008  | 8-1/2"             | 6            | 150W        | 6    | 7            | 42676-3       |

Brooder/Heat Lamp

Brooder lamps have 10" diameter reflectors with protective wire cages and hung-up hooks. SJT wire. Available with or without clamp.

| ITEM # | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|-----------|--------------|-------------|------|--------------|---------------|
| 30000* | 18/2      | 6            | 250W        | 8    | 6            | 43014-2       |
| 30010  | 18/2      | 6            | 250W        | 8    | 7            | 43016-6       |

\*Without clamp

Promotional Grade Automotive Booster Cables

Booster cables packaged in a colorful sleeve with detailed instructions for use printed on back. Available in three lengths of gauge wire with black insulated jacket. Copper Plated steel clamps with insulated color-coded grips. Copper coated aluminum wire.

| ITEM # | GAUGE / WIRE | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|--------------|--------------|-------------|------|--------------|---------------|
| S1012  | 10/2         | 12           | 250         | 12   | 33           | 42016-7       |

Premium Grade Automotive Booster Cable - UL Listed

These Booster Cables meet the exact specifications of UL and are rated as one of the safest, best quality cables available. Premium Grade booster cables include heavy-duty vinyl clad, color-coded extended reach clamps. 100% copper wire

| ITEM # | GAUGE / WIRE | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|--------------|--------------|-------------|------|--------------|---------------|
| B01012 | 10/2         | 12           | 400         | 12   | 35           | 69012-6       |

| ITEM # | GAUGE / WIRE | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|--------------|--------------|-------------|------|--------------|---------------|
| B0812  | 8/2          | 12           | 400         | 6    | 21           | 69000-3       |

| ITEM # | GAUGE / WIRE | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|--------------|--------------|-------------|------|--------------|---------------|
| B0612  | 6/2          | 12           | 400         | 6    | 23           | 69004-1       |
| B0616  | 6/2          | 16           | 400         | 6    | 27           | 69006-5       |

| ITEM # | GAUGE / WIRE | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|--------|--------------|--------------|-------------|------|--------------|---------------|
| B0412  | 4/2          | 12           | 400         | 6    | 29           | 69007-2       |
| B0416  | 4/2          | 16           | 400         | 6    | 35           | 69008-9       |
| B0420  | 4/2          | 20           | 400         | 6    | 43           | 69010-2       |





Temporary Power Boxes



The 50 Amp inlets and outlets are recessed for additional safety. They also feature weatherproof covers.

All outlets are protected with weatherproof covers and are circuit breaker protected against overloads. The 20 Amp outlets have additional GFCI protection for added safety.




All outlets are circuit breaker protected against overloads. The circuit breaker panel has a clear weatherproof cover for easy viewing status of the breakers.



U.S. Wire & Cable's Temporary Power Box is designed to offer power to virtually any large-scale outdoor event, such as: construction sites, carnivals and fairs, convention centers...etc.



TPB-376

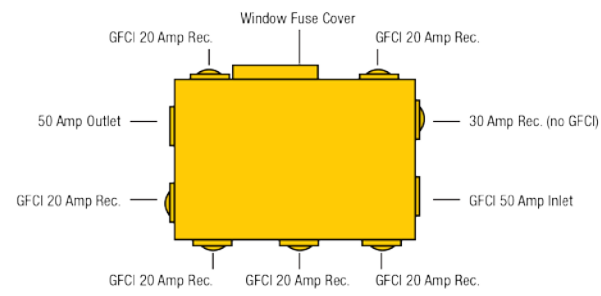

**Applications:**  
Construction sites  
Convention centers  
Stadiums  
Party rentals

Six (6) GFCI protected 20 Amp receptacles (3 circuit breakers)  
30 Amp receptacle for special needs  
Circuit breaker protection for all outlets  
High visibility safety

Temporary Power Box

UL listed. Provides outdoor power, even in wet and damp locations.

| ITEM #   | GA / COND | LENGTH (FT.) | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|----------|-----------|--------------|------|--------------|---------------|
| TPB-376  | U-Ground  | 3            | 1    | 30           | 42842-2       |
| TPB-376L | Locking   | 3            | 1    | 30           | 42843-9       |


Temporary Power Box Cords - STW Black

Made from the highest quality STW wire. The jacketing is resistant to water, weather & abrasion. Heavy Duty 125/250V 50 Amp Plug and Connector.

| ITEM #   | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|----------|-----------|--------------|-------------|------|--------------|---------------|
| TPC-0050 | 6/3,8/1   | 50           | 50A         | 1    | 40           | 42840-8       |
| TPC-0100 | 6/3,8/1   | 100          | 50A         | 1    | 80           | 42841-5       |



TPB-676

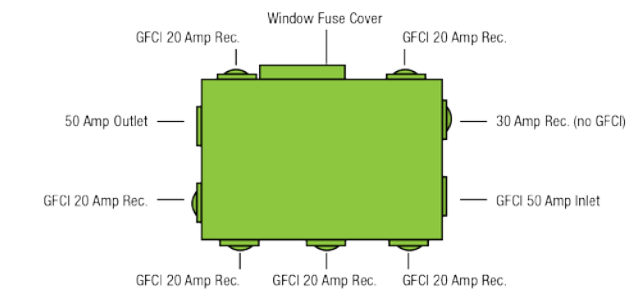

**Applications:**  
Construction sites  
Convention centers  
Stadiums  
Party rentals

Six (6) GFCI protected 20 Amp receptacles (6 circuit breakers)  
30 Amp receptacle for special needs  
Circuit breaker protection for all outlets  
High visibility safety

Deluxe Temporary Power Box


UL listed. Provides outdoor power, even in wet and damp locations.

| ITEM #   | GA / COND | LENGTH (FT.) | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|----------|-----------|--------------|------|--------------|---------------|
| TPB-676  | U-Ground  | 6            | 1    | 44           | 42844-6       |
| TPB-676L | Locking   | 6            | 1    | 44           | 42845-3       |

Temporary Power Box Cords - STW Black Y-Adapter


Heavy Duty 125/250V 50 Amp Plug and Connector.

| ITEM #   | GA / COND | LENGTH (FT.) | 125V RATING | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|----------|-----------|--------------|-------------|------|--------------|---------------|
| TPC-0002 | 6/3,8/1   | 2            | 50A         | 1    | 7            | 42846-0       |

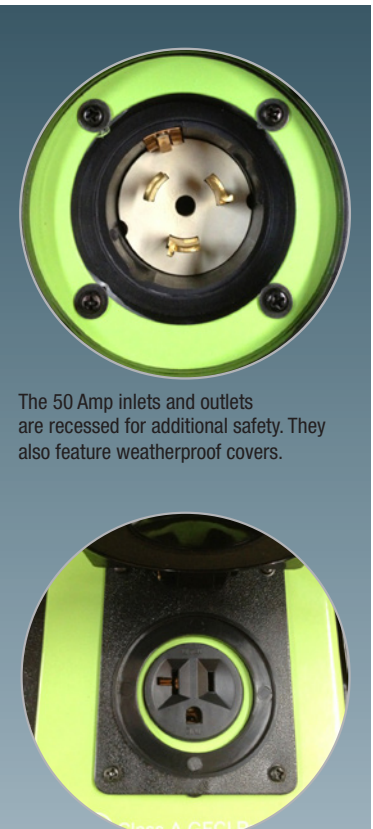

The 50 Amp inlets and outlets are recessed for additional safety. They also feature weatherproof covers.

All outlets are protected with weatherproof covers and are circuit breaker protected against overloads. The 20 Amp outlets have additional GFCI protection for added safety.

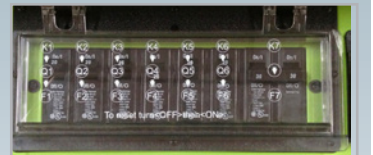

All outlets are circuit breaker protected against overloads. The circuit breaker panel has a clear weatherproof cover for easy viewing status of the breakers.





TYPE SVT • UL • CSA • 300V • 60°C - 105°C\*

Supplied on a 24" Non Returnable Reel

| # | CONDUCTOR<br>AWG. | STRD  | INSUL. | NOMINALS (IN.)<br>JACKET | O.D. | AMPS | SHIP WT.<br>LBS./M. FT. |
|---|-------------------|-------|--------|--------------------------|------|------|-------------------------|
| 2 | 18                | 41x34 | .015   | .030                     | .235 | 10   | 30                      |
| 3 | 18                | 41x34 | .015   | .030                     | .245 | 10   | 38                      |
| 4 | 18                | 41x34 | .015   | .030                     | .255 | 7    | 44                      |
| 2 | 17                | 52x34 | .015   | .030                     | .245 | 11.5 | 36                      |
| 3 | 17                | 52x34 | .015   | .030                     | .260 | 11.5 | 46                      |

Conductor: Fully annealed stranded bare copper.  
Jacket: Thermoplastic (PVC) 300 volt ribbed or smooth  
Note: Available with green or green/yellow ground.  
Application: Used on floor polishers, sanders, vacuum cleaners, food mixers and office machines  
Approvals: UL-Subject 62      CSA-C22.2-49      RoHS Compliant

TYPE SJT-SJTO-SJTOW •UL • CSA • 300V • 60°C - 105°C\*

Supplied on a 24"- 30" Non Returnable Reel

| # | CONDUCTOR<br>AWG. | STRD   | INSUL. | NOMINALS (IN.)<br>JACKET | O.D. | AMPS | SHIP WT.<br>LBS./M. FT. |
|---|-------------------|--------|--------|--------------------------|------|------|-------------------------|
| 2 | 18                | 16x30  | .030   | .030                     | .285 | 10   | 42                      |
| 3 | 18                | 16x30  | .030   | .030                     | .300 | 10   | 51                      |
| 4 | 18                | 16x30  | .030   | .030                     | .330 | 7    | 68                      |
| 5 | 18                | 16x30  | .030   | .030                     | .365 | 5.6  | 88                      |
| 6 | 18                | 16x30  | .030   | .030                     | .400 | 5.6  | 110                     |
| 7 | 18                | 16x30  | .030   | .030                     | .415 | 5.6  | 130                     |
| 2 | 16                | 26x30  | .030   | .030                     | .309 | 10   | 51                      |
| 3 | 16                | 26x30  | .030   | .030                     | .327 | 13   | 72                      |
| 4 | 16                | 26x30  | .030   | .030                     | .359 | 10   | 85                      |
| 5 | 16                | 26x30  | .030   | .030                     | .395 | 8    | 110                     |
| 6 | 16                | 26x30  | .030   | .045                     | .470 | 8    | 136                     |
| 7 | 16                | 26x30  | .030   | .045                     | .480 | 8    | 170                     |
| 2 | 14                | 41x30  | .030   | .030                     | .341 | 18   | 73                      |
| 3 | 14                | 41x30  | .030   | .030                     | .361 | 18   | 92                      |
| 4 | 14                | 41x30  | .030   | .030                     | .397 | 15   | 111                     |
| 5 | 14                | 41x30  | .030   | .045                     | .470 | 12   | 140                     |
| 2 | 12                | 65x30  | .030   | .045                     | .411 | 25   | 103                     |
| 3 | 12                | 65x30  | .030   | .045                     | .434 | 25   | 131                     |
| 4 | 12                | 65x30  | .030   | .045                     | .475 | 20   | 165                     |
| 5 | 12                | 65x30  | .030   | .045                     | .510 | 16   | 204                     |
| 2 | 10                | 104x30 | .045   | .060                     | .553 | 30   | 160                     |
| 3 | 10                | 104x30 | .045   | .060                     | .585 | 30   | 221                     |

Conductor: Fully annealed stranded bare per ASTM B-174  
Jacket: Polyvinyl Chloride (PVC)  
Temperature: 105°C or 60°C (221°F or 140°F) to -40°C  
Note: Available with green or green/yellow ground.  
Applications: For use as portable power cord for power tools, motors, appliances and hospital equipment.  
Excellent resistance to water, acids, ozone and oils.  
Approvals: UL-Subject 62      CSA C22.2-49      OSHA      RoHS Compliant

\*Please contact U.S. Wire & Cable for availability.

TYPE SVE-SVE0 • UL • CSA • 300V •105°C\*

Supplied on a 24" Non Returnable Reel

| # | CONDUCTOR<br>AWG. | STRD  | INSUL. | NOMINALS (IN.)<br>JACKET | O.D. | AMPS | SHIP WT.<br>LBS./M. FT. |
|---|-------------------|-------|--------|--------------------------|------|------|-------------------------|
| 2 | 18                | 41x34 | .015   | .030                     | .235 | 10   | 30                      |
| 3 | 18                | 41x34 | .015   | .030                     | .245 | 10   | 38                      |
| 4 | 18                | 41x34 | .015   | .030                     | .255 | 7    | 44                      |
| 2 | 17                | 52x34 | .015   | .030                     | .245 | 11.5 | 36                      |
| 3 | 17                | 52x34 | .015   | .030                     | .260 | 11.5 | 46                      |

Conductor: Fully annealed stranded bare copper.  
Jacket: Thermoplastic (PVC) or Elastomer  
Note: Available with green or green/yellow ground.  
Temperature: -40°C to 105°C  
Application: Used on floor polishers, sanders, vacuum cleaners, food mixers and office machines  
Approvals: UL-Subject 62      CSA-C22.2-49      RoHS Compliant

TYPE SJE-SJEOW-SJEW • UL • CSA • 300V • 105°C\*

Supplied on a 24" - 30" Non Returnable Reel


| # | CONDUCTOR<br>AWG. | STRD   | INSUL. | NOMINALS (IN.)<br>JACKET | O.D. | AMPS | SHIP WT.<br>LBS./M. FT. |
|---|-------------------|--------|--------|--------------------------|------|------|-------------------------|
| 2 | 18                | 16x30  | .030   | .030                     | .285 | 10   | 42                      |
| 3 | 18                | 16x30  | .030   | .030                     | .300 | 10   | 51                      |
| 4 | 18                | 16x30  | .030   | .030                     | .330 | 7    | 68                      |
| 5 | 18                | 16x30  | .030   | .030                     | .365 | 5.6  | 88                      |
| 6 | 18                | 16x30  | .030   | .030                     | .400 | 5.6  | 110                     |
| 7 | 18                | 16x30  | .030   | .030                     | .415 | 5.6  | 130                     |
| 2 | 16                | 26x30  | .030   | .030                     | .309 | 10   | 51                      |
| 3 | 16                | 26x30  | .030   | .030                     | .327 | 13   | 72                      |
| 4 | 16                | 26x30  | .030   | .030                     | .359 | 10   | 85                      |
| 5 | 16                | 26x30  | .030   | .030                     | .395 | 8    | 110                     |
| 6 | 16                | 26x30  | .030   | .045                     | .470 | 8    | 136                     |
| 7 | 16                | 26x30  | .030   | .045                     | .480 | 8    | 170                     |
| 2 | 14                | 41x30  | .030   | .030                     | .341 | 18   | 73                      |
| 3 | 14                | 41x30  | .030   | .030                     | .361 | 18   | 92                      |
| 4 | 14                | 41x30  | .030   | .030                     | .397 | 15   | 111                     |
| 5 | 14                | 41x30  | .030   | .045                     | .470 | 12   | 140                     |
| 2 | 12                | 65x30  | .030   | .045                     | .411 | 25   | 103                     |
| 3 | 12                | 65x30  | .030   | .045                     | .434 | 25   | 131                     |
| 4 | 12                | 65x30  | .030   | .045                     | .475 | 20   | 165                     |
| 5 | 12                | 65x30  | .030   | .045                     | .510 | 16   | 204                     |
| 2 | 10                | 104x30 | .045   | .060                     | .553 | 30   | 160                     |
| 3 | 10                | 104x30 | .045   | .060                     | .585 | 30   | 221                     |

Conductor: Fully annealed stranded bare per ASTM B - 174  
Insulation/Jacket: Polyvinyl Chloride (PVC) or Elastomer  
Temperature: 105°C or 60°C (221°F or 140°F) to -50°C  
Note: Available with green or green/yellow ground  
Application: For use as portable power cord for power tools, motors, appliances and hospital equipment.  
Excellent resistance to water, acids, ozone and oils.  
Approvals: UL-Subject 62      CSA C22.2-49      OSHA      RoHS Compliant

\*Please contact U.S. Wire & Cable for availability.





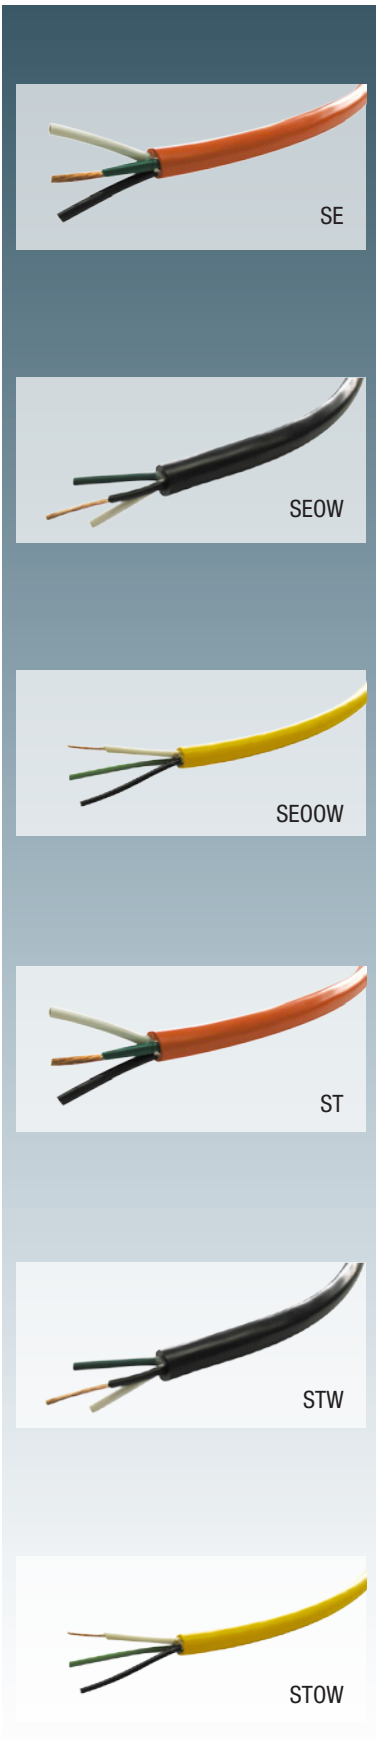

TYPE SE-SE0-SEOW • UL • CSA • 600V • 105°C\*  
Supplied on a 30" Non Returnable Reel

| # | CONDUCTOR<br>AWG. | STRD   | INSUL. | NOMINALS (IN.)<br>JACKET | O.D. | AMPS | SHIP WT.<br>LBS./M. FT. |
|---|-------------------|--------|--------|--------------------------|------|------|-------------------------|
| 2 | 18                | 16x30  | .030   | .060                     | .345 | 10   | 65                      |
| 3 | 18                | 16x30  | .030   | .060                     | .361 | 10   | 76                      |
| 4 | 18                | 16x30  | .030   | .060                     | .390 | 7    | 89                      |
| 2 | 16                | 26x30  | .030   | .060                     | .369 | 13   | 76                      |
| 3 | 16                | 26x30  | .030   | .060                     | .387 | 13   | 91                      |
| 4 | 16                | 26x30  | .030   | .060                     | .419 | 10   | 103                     |
| 2 | 14                | 41x30  | .045   | .080                     | .501 | 18   | 127                     |
| 3 | 14                | 41x30  | .045   | .080                     | .526 | 18   | 152                     |
| 4 | 14                | 41x30  | .045   | .080                     | .569 | 15   | 186                     |
| 2 | 12                | 65x30  | .045   | .095                     | .573 | 25   | 167                     |
| 3 | 12                | 65x30  | .045   | .095                     | .601 | 25   | 208                     |
| 2 | 10                | 105x30 | .045   | .095                     | .630 | 30   | 230                     |
| 3 | 10                | 105x30 | .045   | .095                     | .670 | 30   | 280                     |

Conductor: Fully annealed stranded bare copper.  
Insulation/Jacket: Thermoplastic (PVC) or Elastomer  
Temperature: 105°C or 60°C (221°F or 140°F) to -50°C  
Note: Available with green or green/yellow ground.  
Application: For use as portable power cord for power tools, motors, appliances and hospital equipment. Excellent resistance to water, acids, ozone and oils.  
Approvals: UL-Subject 62    CSA C22.2-49    OSHA    RoHS Compliant

TYPE ST-ST0-STOW • UL • CSA • 600V • 60°C - 105°C\*  
Supplied on a 30" Non Returnable Reel

| # | CONDUCTOR<br>AWG. | STRD   | INSUL. | NOMINALS (IN.)<br>JACKET | O.D. | AMPS | SHIP WT.<br>LBS./M. FT. |
|---|-------------------|--------|--------|--------------------------|------|------|-------------------------|
| 2 | 18                | 16x30  | .030   | .060                     | .345 | 10   | 65                      |
| 3 | 18                | 16x30  | .030   | .060                     | .361 | 10   | 76                      |
| 4 | 18                | 16x30  | .030   | .060                     | .390 | 7    | 89                      |
| 2 | 16                | 26x30  | .030   | .060                     | .369 | 13   | 76                      |
| 3 | 16                | 26x30  | .030   | .060                     | .387 | 13   | 91                      |
| 4 | 16                | 26x30  | .030   | .060                     | .419 | 10   | 103                     |
| 2 | 14                | 41x30  | .045   | .080                     | .501 | 18   | 127                     |
| 3 | 14                | 41x30  | .045   | .080                     | .526 | 18   | 152                     |
| 4 | 14                | 41x30  | .045   | .080                     | .569 | 15   | 186                     |
| 2 | 12                | 65x30  | .045   | .095                     | .573 | 25   | 167                     |
| 3 | 12                | 65x30  | .045   | .095                     | .601 | 25   | 208                     |
| 2 | 10                | 105x30 | .045   | .095                     | .630 | 30   | 230                     |
| 3 | 10                | 105x30 | .045   | .095                     | .670 | 30   | 280                     |

Conductor: Fully annealed stranded bare copper  
Insulation/Jacket: Thermoplastic (PVC) 600 volt  
Temperature: 105°C or 60°C (221°F or 140°F) to -40°C  
Note: Available with green or green/yellow ground.  
Applications: For use as portable power cord for power tools, motors, appliances and hospital equipment. Excellent resistance to water, acids, ozone and oils.  
Approvals: UL-Subject 62    CSA C22.2-49    OSHA    RoHS Compliant

\*Please contact U.S. Wire & Cable for availability.

Wire & Cable Abbreviations

S = Service  
J = Junior  
O = Oil Resistant  
T = Thermoplastic/Vinyl  
W-A = Weather Approved  
P = Parallel  
E = Elastomer

SEOW

Extra hard service cord. Thermoplastic elastomer, oil resistant (TPE) construction jacket. 600 volt, weather resistant for outdoor use.

SJEW

Hard service Thermoplastic or rubber-insulated conductors and overall Thermoplastic jacket. All elastomer construction. 300V, 90°C to 105°C. Weather resistant.

SJEW0

Hard service Thermoplastic or rubber-insulated conductors and oil resistant overall Thermoplastic jacket. All elastomer construction. 300V, 90°C to 105°C. Weather resistant.

SEW

Extra hard service cord TPE jacketed all Thermoplastic Elastomer (TPE) construction. 600V, 90°C to 105°C. Weather resistant for outdoor use.

STW

Extra hard service cord. Thermoplastic constructed jacket. 600 volt, weather resistant for outdoor use.

SJTW

Hard service cord. Thermoplastic constructed jacket. 300 volt, weather resistant for outdoor use.

SPT-1

Thermoplastic constructed cord, parallel jacketed, 300 volt, 2 or 3 conductor, 18 gauge.

SPT-2

Same as SPT-1 except heavier construction. 18-16 gauge.

SPT-3

Same as SPT-2 except heavier construction. 18-10 gauge.

SRDT

Range and dryer cord, 3 conductor parallel or 4 conductors insulated thermoplastic construction.

SVT

Vacuum cleaner service cord. All plastic construction, 2 or 3 conductor.

TPE

Abbreviation for thermoplastic elastomer compound used in Arctic/Tropic (SJEW) and Frigid-Flex (SJEW) cords.

AWG

American Wire Gauge. A relative system for the designation of diameter.

Alternating Current

Or line voltage-U.S. household standard current is 110/120 volts, 60 cycle.

AMP Load

Total amount of amperage flowing through a conductor (wire) when it is loaded.

Bell Wire

Vinyl covered copper wire, normally 18 gauge, used for low voltage wiring, i.e.: doorbell, chimes, etc.

Centigrade

Metric temperature scale, where water freezes at 0° (compared to 32° Fahrenheit), and boils at 100° (compared to 212°F).

Circuit

The path that electricity flows through a conductor.

Compound

Insulation or jacketing material of two or more ingredients.

Conductor

Material (wire) that is capable of transporting an electrical charge easily. Cords can be two points or a single wire or individual wires in a cable.

Continuity Test

Determines whether an electrical path exists between two points of a single wire or individual wires in a cable.

Cord

An insulated wire (conductor) for conveying current.

Current

The flow of electricity through a conductor measured in amperes.

Direct Current (DC)

An electrical current that flows in one direction. Batteries are an example of DC current production.

Decibel (db)

A unit of power output (acoustical or electrical), for example, power gain in amplifiers or power loss in cables.

Diode

An electrical component that passes current in one direction and blocks it in the other direction.

Fahrenheit

English temperature scale, where water freezes at 32° (compared to 0 Centigrade), and boils at 212° (compared to 100°C).

Gauge

Term used to denote physical size of wire.

Ground

Electrical term referring to connecting to the earth or large conducting body to serve as earth.

Hot Conductor

Pertains to any ungrounded conductor, or energized wire.

HPN

Parallel Heater Cord, typically Neoprene insulated two conductor.

Insulation

Non-conductive material that surrounds or separates two conductive materials (wire).

Milliamp

One thousand (.001) of amp.

NEMA

National Electrical Manufacturers.

OSHA

Occupational Safety and Health Act. Specifically the Williams-Steiger law passed in 1970 covering all factors relating to safety in places of employment.

Polarity

Condition by which the direction of current flow can be determined in an electrical circuit.

Polarized Plug

A plug constructed to allow insertion into a receptacle only one way because one blade is wider than the other.

Primary Wire

Intended for low voltage applications, usually less then 50 volts. Used mainly in autos/trucks or battery operated equipment.

PVC

Polyvinyl Chloride. Compound used in thermoplastic (SJTW, STW) cords.

Rated Voltage

Maximum voltage at which an electrical component can be operated for extended periods without causing a safety hazard or undue degradation.

Resistance

A substance that impedes the flow of current resulting in loss of power, such as heat.

Sheath

Outer jacket or covering of multi-conductor cable.

Stranded Conductor

A wire conductor comprised of a group of twisted or braided strands of wire, providing flexibility a single strand of wire of the same gauge cannot.

Thermoplastic

Plastic material that softens when heated and firms when cooled. Examples are Poly Vinyl Chloride and Polyethylene.

UL

Underwriters Laboratories, an independent, non-profit organization that operates a listing service for electrical/electronic materials/equipment.

Volt

Unit to measure electromotive force.

Watt

Unit of electrical power defined as one amp of current driven by one volt of electromotive force.



Flexon Industries, a U.S. Wire & Cable Corporation affiliate, is a manufacturer of garden hoses for home and industry. U.S. Wire offers the opportunity to purchase these hoses directly from Flexon. The items listed below are the most popular with industrial users and can be combined with wire orders to meet minimum shipping requirements. For a copy of the full line Flexon catalog, contact your U.S. Wire representative or call toll free: (800) 327-4673.

Flextreme™ All-Weather Hose

Maximum flexibility all year round, Soft & flexible, Kink-free construction, Double nylon-reinforcement, Crush-proof couplings.

| ITEM #    | DIAMETER (IN.) X LENGTH (FT.) | HOSE TYPE        | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|-----------|-------------------------------|------------------|------|--------------|---------------|
| FLXT5850  | 5/8" x 50'                    | Flexible Polymer | 4    | 33           | 30495-5       |
| FLXT58100 | 5/8" x 100'                   | Flexible Polymer | 2    | 33           | 30497-9       |



FLXT5850

Heavy Duty Premium Hose

Forever-flow construction, Guard-N-Grip connector\*, High burst strength, Double nylon-reinforcement, Crush-proof couplings.

| ITEM #   | DIAMETER (IN.) X LENGTH (FT.) | HOSE TYPE          | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|----------|-------------------------------|--------------------|------|--------------|---------------|
| FXG5825  | 5/8" x 25'                    | 5-Ply Rubber/Vinyl | 5    | 23           | 30501-3       |
| FXG5850  | 5/8" x 50'                    | 5-Ply Rubber/Vinyl | 5    | 42           | 30502-0       |
| FXG5875  | 5/8" x 75'                    | 5-Ply Rubber/Vinyl | 3    | 38           | 30504-4       |
| FXG58100 | 5/8" x 100'                   | 5-Ply Rubber/Vinyl | 3    | 50           | 30506-8       |
| FXG3450  | 3/4" x 50'                    | 5-Ply Rubber/Vinyl | 5    | 63           | 30508-2       |
| FXG3475  | 3/4" x 75'                    | 5-Ply Rubber/Vinyl | 3    | 52           | 30510-5       |
| FXG34100 | 3/4" x 100'                   | 5-Ply Rubber/Vinyl | 2    | 58           | 30511-2       |

\*Not available on 3/4" hoses.



FXG5850

Contractor Grade Rubber & Vinyl Hose

6-ply construction, High burst strength, Commercial-grade performance & durability, Lifetime guarantee

| ITEM #  | DIAMETER (IN.) X LENGTH (FT.) | HOSE TYPE          | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|---------|-------------------------------|--------------------|------|--------------|---------------|
| CG5825  | 5/8" x 25'                    | 6-Ply Rubber/Vinyl | 5    | 23           | 44011-0       |
| CG5850  | 5/8" x 50'                    | 6-Ply Rubber/Vinyl | 5    | 35           | 44013-4       |
| CG5860  | 5/8" x 60'                    | 6-Ply Rubber/Vinyl | 5    | 42           | 44014-1       |
| CG58100 | 5/8" x 100'                   | 6-Ply Rubber/Vinyl | 3    | 42           | 44012-7       |



CG5860

Professional Rubber & Vinyl Hose

5-ply construction, Superior burst strength, Commercial-grade performance & durability, machined crush-proof solid couplings.

| ITEM #  | DIAMETER (IN.) X LENGTH (FT.) | HOSE TYPE          | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|---------|-------------------------------|--------------------|------|--------------|---------------|
| CX5850  | 5/8" x 50'                    | 5-Ply Rubber/Vinyl | 5    | 40           | 68042-4       |
| CX5875  | 5/8" x 75'                    | 5-Ply Rubber/Vinyl | 3    | 36           | 68032-5       |
| CX3450  | 5/8" x 50'                    | 5-Ply Rubber/Vinyl | 3    | 55           | 68045-5       |
| CX3475  | 5/8" x 75'                    | 5-Ply Rubber/Vinyl | 3    | 45           | 68046-2       |
| CX34100 | 5/8" x 100'                   | 5-Ply Rubber/Vinyl | 2    | 55           | 68071-4       |




CX5850

Commercial Premium Rubber Hose

Ideal for commercial use, high burst strength, crush proof couplings.

| ITEM #    | DIAMETER (IN.) X LENGTH (FT.) | HOSE TYPE    | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|-----------|-------------------------------|--------------|------|--------------|---------------|
| PH1225CN  | 1/2" x 25'                    | Black Rubber | 10   | 45           | 66481-3       |
| PH1250CN  | 1/2" x 50'                    | Black Rubber | 5    | 45           | 66479-0       |
| PH12100CN | 1/2" x 100'                   | Black Rubber | 3    | 48           | 66478-3       |
| PH5825CN  | 5/8" x 25'                    | Black Rubber | 5    | 26           | 66485-1       |
| PH5850CN  | 5/8" x 50'                    | Black Rubber | 5    | 47           | 66486-8       |
| PH5875CN  | 5/8" x 75'                    | Black Rubber | 3    | 42           | 66487-5       |
| PH58100CN | 5/8" x 100'                   | Black Rubber | 3    | 54           | 66489-9       |



PH5850CN

Hot Water Premium Red Rubber Hose

3/4" for greater water flow, Withstands hot water to 180° F, Stays flexible in cold temperatures, Crush proof couplings.

| ITEM #    | DIAMETER (IN.) X LENGTH (FT.) | HOSE TYPE  | PACK | WEIGHT (LBS) | UPC: 0-44882- |
|-----------|-------------------------------|------------|------|--------------|---------------|
| FAR3450CN | 3/4" X 50'                    | Red Rubber | 3    | 45           | 67302-0       |



FAR3450CN



|                      |                   |                     |                      |
|----------------------|-------------------|---------------------|----------------------|
| 30000 . . . . .14    | 54075 . . . . . 7 | 89002 . . . . . 4   | TL215 . . . . .13    |
| 30005 . . . . .14    | 54100 . . . . . 7 | 89025 . . . . . 4   | TL225 . . . . .13    |
| 30008 . . . . .14    | 54162 . . . . . 9 | 89050 . . . . . 4   | TL325 . . . . .13    |
| 30010 . . . . .14    | 54163 . . . . . 9 | 89100 . . . . . 4   | TL350 . . . . .13    |
| 32050 . . . . . 8    | 54165 . . . . . 9 | 90050EXT . . . . 4  | TL525 . . . . .13    |
| 32100 . . . . . 8    | 54182 . . . . . 9 | 90100EXT . . . . 4  | TL550 . . . . .13    |
| 33050 . . . . . 8    | 54183 . . . . . 9 | 96050DBL . . . . 7  | TL625 . . . . .13    |
| 33100 . . . . . 8    | 54265 . . . . . 9 | 96050GRL . . . . 7  | TL650 . . . . .13    |
| 35002 . . . . . 8    | 54266 . . . . . 9 | 96050MBL . . . . 7  | TL825 . . . . .13    |
| 35002U . . . . . 9   | 55050 . . . . . 7 | 96050PKL . . . . 7  | TL850 . . . . .13    |
| 35003 . . . . . 8    | 55100 . . . . . 7 | 96050PPL . . . . 7  | TL925 . . . . .13    |
| 35003U . . . . . 9   | 58050 . . . . . 7 | 96050RDL . . . . 7  | TPB-376 . . . . .15  |
| 35010 . . . . . 8    | 58100 . . . . . 7 | 96100DBL . . . . 7  | TPB-376L . . . . .15 |
| 35015 . . . . . 8    | 59025 . . . . . 5 | 96100GRL . . . . 7  | TPB-676 . . . . .16  |
| 42050 . . . . . 7    | 59050 . . . . . 5 | 96100MBL . . . . 7  | TPB-676L . . . . .16 |
| 45005 . . . . .11    | 59100 . . . . . 5 | 96100PKL . . . . 7  | TPC-0002 . . . . .16 |
| 45005J . . . . .11   | 60010 . . . . . 6 | 96100PPL . . . . 7  | TPC-0050 . . . . .15 |
| 45005MC . . . . .11  | 60025 . . . . . 6 | 96100RDL . . . . 7  | TPC-0100 . . . . .15 |
| 45005MCJ . . . . .11 | 60050 . . . . . 6 | 97025 . . . . . 4   |                      |
| 45005RCM . . . . .11 | 60100 . . . . . 6 | 97050 . . . . . 4   |                      |
| 45005RCP . . . . .11 | 62010 . . . . . 6 | 97100 . . . . . 4   |                      |
| 45010 . . . . .11    | 62025 . . . . . 6 | 98025 . . . . . 4   |                      |
| 45010J . . . . .11   | 62050 . . . . . 6 | 98025PB . . . . . 4 |                      |
| 45010MC . . . . .11  | 62100 . . . . . 6 | 98050 . . . . . 4   |                      |
| 45010MCJ . . . . .11 | 63025 . . . . . 6 | 98050PB . . . . . 4 |                      |
| 46001N . . . . .12   | 63050 . . . . . 6 | 98100 . . . . . 4   |                      |
| 46003N . . . . .12   | 63100 . . . . . 6 | 98100PB . . . . . 4 |                      |
| 46005N . . . . .12   | 66050 . . . . . 6 | 99025 . . . . . 4   |                      |
| 46020B . . . . .12   | 66100 . . . . . 6 | 99025PB . . . . . 4 |                      |
| 46020BB3 . . . . .12 | 68050 . . . . . 5 | 99050 . . . . . 4   |                      |
| 46020BB6 . . . . .12 | 68100 . . . . . 5 | 99050PB . . . . . 4 |                      |
| 46103N . . . . .12   | 70000 . . . . . 9 | 99100 . . . . . 4   |                      |
| 46105N . . . . .12   | 70002 . . . . . 9 | 99100PB . . . . . 4 |                      |
| 46302N . . . . .11   | 70004 . . . . . 9 | B01012 . . . . .14  |                      |
| 46303N . . . . .11   | 70102 . . . . . 9 | B0412 . . . . .14   |                      |
| 46305N . . . . .11   | 70104 . . . . . 9 | B0416 . . . . .14   |                      |
| 46306N . . . . .11   | 72025 . . . . . 5 | B0420 . . . . .14   |                      |
| 46403N . . . . .11   | 72050 . . . . . 5 | B0612 . . . . .14   |                      |
| 46405N . . . . .11   | 72100 . . . . . 5 | B0616 . . . . .14   |                      |
| 50017 . . . . .10    | 73025 . . . . . 5 | B0812 . . . . .14   |                      |
| 50020 . . . . .10    | 73050 . . . . . 5 | S1012 . . . . .14   |                      |
| 50022 . . . . .10    | 73100 . . . . . 5 |                     |                      |
| 50024 . . . . .10    | 74025 . . . . . 5 |                     |                      |
| 50025 . . . . .10    | 74050 . . . . . 5 |                     |                      |
| 50026 . . . . .10    | 74100 . . . . . 5 |                     |                      |
| 50028 . . . . .10    | 76002 . . . . . 5 |                     |                      |
| 50040 . . . . . 6    | 76025 . . . . . 5 |                     |                      |
| 50080 . . . . . 6    | 76050 . . . . . 5 |                     |                      |
| 53010 . . . . . 6    | 76100 . . . . . 5 |                     |                      |
| 53025 . . . . . 6    | 88025 . . . . . 4 |                     |                      |
| 53050 . . . . . 6    | 88050 . . . . . 4 |                     |                      |
| 53100 . . . . . 6    | 88100 . . . . . 4 |                     |                      |



## Notes





## U.S. WIRE & CABLE CORP.

One Flexon Plaza, Newark, NJ 07114  
Ph: (973) 824-5530 • Fax: (973) 824-1208  
Toll free: (800) 327-4673  
[uswireandcable.com](http://uswireandcable.com)

